


Note: Shown for  
Type A, B and  
C Bms. Replace  
1'-0" dimensions  
with 1'-2" for  
Type IV Bms.

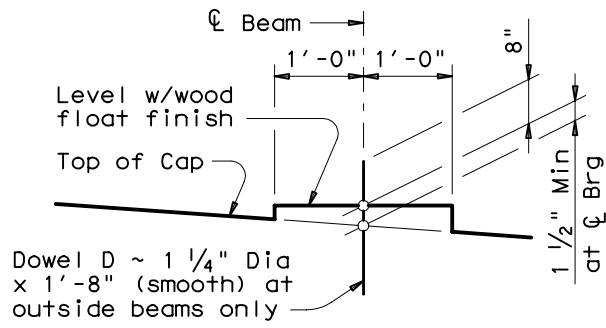

## BEARING SEAT DETAIL

(Bearing surface shall be clean and free of  
all loose material before placing bearing pad.)

Fig. 4-29